


MPEG-4 Video Transcoder

Features

- Decoding MPEG-4 Video Streaming to Analog Composite Video Signal
- Full D1 MPEG-4 Video Decoding at 30/25 FPS
- QoS enabled (L3) Video Streaming
- Dual MPEG-4 Video Stream Input LAN or WAN Port Built-in
- Supports TCP/IP, UDP, HTTP, DHCP, RTP, RTSP, PPPoE, FTP & SMTP.
- Digital Time Code Retrieved
- Application Software:
Supports Windows 2000/Win XP OS
Supports Up to 16 IP Cameras
Supports PTZ Control
Supports Motion Detection
Supports DI/DO



WVR-130

MPEG-4 Video Transcoder with Full D1 Resolution


WVR-130A

MPEG-4 Video Transcoder with Full D1 Resolution + 2-Way Audio

Specification

Model	WVR-130	WVR-130A
Image Compression	MPEG-4 ASP compliant compression	
Image Frame Rate	NTSC: 30 fps ; PAL: 25 fps	
Max. Resolution	Full D1 ; CIF ; QCIF	
Ethernet	10/100 Base-T for LAN and WAN	
Support Protocols	TCP, UDP, IP, HTTP, DHCP, PPPoE ,RTP,RTSP,FTP,SMTP	
Bit Rate	28 K ~ 3 M bps	
Network	Ethernet (10/100Base-T), RJ-45 connector	
Composite Input	8, CVBS, 1.0Vp-p with 75 O loading, BNC connector	
Composite Output	N/A	
Multi-stream	Up to 4 configurable frame rate/bit rate streams for preview and recording	
Serial Port	RS-485: RS-422;RS-232	
Security	Password protection : configured by the administrator	
Alarm I/O	2,TTL,terminal block	
Audio Input Compression	N/A	8 kHz,Mono,PCM
Audio Line Input	N/A	Unbalanced,1.4Vp-p,1Vrms,3.5 mm jack
Audio Output Compression	N/A	8 kHz,Mono,PCM
Audio Line Output	N/A	Unbalanced,1.4Vp-p,1Vrms,3.5 mm jack
Operating Temperature	5 ~ 50 °C (40 ~ 122 °F)	
SDK	ActiveX control, C SDK	
Power Consumption	7.5 W	
Power Supply	DC 12 V ±10%	
Dimension	112mm x 37.2mm x 119mm	
Weight	350 g	

Dimensions

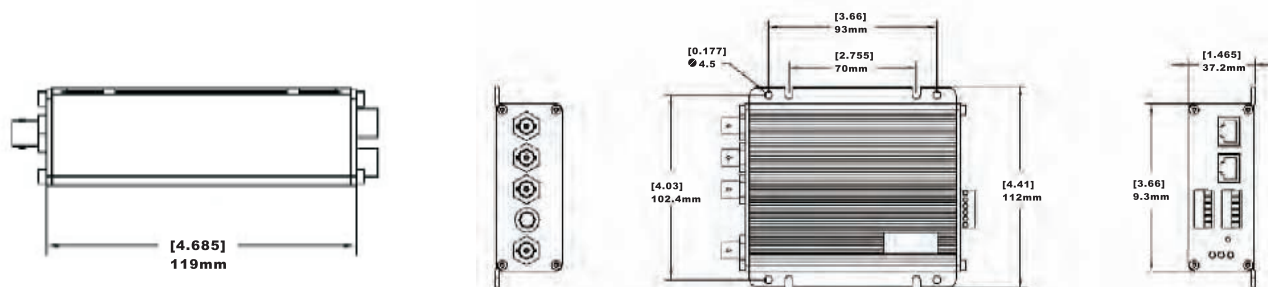

CCTV Equipment, Digital Storage & Network Solutions

Box Cameras

Day/Night Cameras

Board Cameras

Dome Cameras

Network Solutions

PTZ Speed Domes